



# CIVIL WORKS

# EQUIPMENT SOLUTIONS

1 November 2018 - 31 January 2019



## BT Series Bluetooth Grease Lubricators

- Complete with general purpose NLGI2 grease

PRODUCT NUMBER	PRODUCT DESCRIPTION	PRICE INC GST
BT60/PL1	Pulsarlube 60cc Bluetooth grease lubricator	\$738.00
BT120/PL1	Pulsarlube 120cc Bluetooth grease lubricator	\$753.00
BT240/PL1	Pulsarlube 240cc Bluetooth grease lubricator	\$775.00
BT480/PL1	Pulsarlube 500cc Bluetooth grease lubricator	\$884.00

- BT Series Bluetooth lubricators enable easy maintenance through wireless communication
- When paired with smart phone Apps, lubricator status updates and location can be monitored
- Mode of lubricator operation & dispensing periods can be determined remotely
- Security is guaranteed for authorised users
- Ideal to control lubricators in confined or unsafe locations

530610

\$1,269.00

## Heavy Duty 60:1 Ratio 180kg Drum Pump

- Continuous duty flow rates of up to 900g/min
- Maximum outlet pressure of 8,700psi (600bar)
- Noise level of 80dB ensures quiet operation
- Air pressure operating range: 20psi to 145psi (2bar to 10bar)
- 3/8" BSP (f) air inlet
- Less moving parts ensure a lower cost of ownership
- Total pump height of 803mm (pump tube height of 516mm)



670AN5

\$1,212.00

## 20V 4.0 Amp Lithium-ion Cordless Grease Gun

- Industry leading 4.0Ah main battery plus a 2.5Ah second battery
- Up to 35 cartridges per battery charge
- Delivery rates of up to 170g/min (high) and 113g/min (low), delivery and pressure adjustable
- Grease pressures of up to 10,000psi (690bar)
- Built in Intelligence shows when a grease point is blocked
- LCD with real time battery capacity, grease level and grease metering information

670AN5-SKIN skin only model also now available \$611.00



DK50 Alemlube

\$1,512.00

## Diesel Driven 2" Diesel & Water Transfer Engine Pump

- Complete with electric key start
- Flow rates of up to 500L/min
- 4.0HP (3,600rpm) air cooled 4-stroke diesel engine
- 2" (50mm) inlet/outlet
- Maximum suction head of 7m
- Maximum lift head of 28m
- Fuel tank capacity of 2.5L
- Oil tank capacity of 0.75L
- Fully portable with wheels, sturdy frame and handles

D50 as above but pull start \$1,129.00



DK80 Alemlube

\$1,925.00

## Diesel Driven 3" Diesel & Water Transfer Engine Pump

- Complete with electric key start
- Flow rates of up to 900L/min
- 6.0HP (3,600rpm) air cooled 4-stroke diesel engine
- 3" (80mm) inlet/outlet
- Maximum suction head of 7m
- Maximum lift head of 26m
- Fuel tank capacity of 3.5L
- Oil tank capacity of 1.1L
- Fully portable with wheels, sturdy frame and handles

D80 as above but pull start \$1,238.00





**52040** \$426.00  
**12V Self Priming Diesel Fuel Transfer Pump**

- Flow rates of up to 50L/min
- Self-priming 12V electric pump with on/off switch
- Sturdy handle for convenient portability
- Duty cycle of 30 minutes on, 30 minutes off
- Maximum working pressure of 22psi (1.5bar)
- BSP inlet & outlet connections
- Power: 300 Watt : 2900 rpm
- Weight: 4.2kg



**50056** \$1,789.00  
**240V Diesel Fuel Dispenser**

- Facilitates quick, secure and safe fuel transfer for non-commercial users
- Flow rates of up to 56L/min
- 30 mins duty cycle, IP 45 protection grade
- Complete with self priming vane pump, 4-digit mechanical meter, 4m of antistatic delivery hose, and an automatic shut off nozzle with swivel connection



**50090 High Flow** \$2,170.00  
**240V Diesel Fuel Dispenser**

- Facilitates quick, secure and safe fuel transfer for non-commercial users
- Flow rates of up to 90L/min
- 30 mins duty cycle, IP 45 protection grade
- Complete with self priming vane pump, 4-digit mechanical meter, 4m of antistatic delivery hose, and an automatic shut off nozzle with swivel connection



**50070** \$1,979.00  
**240V Diesel Fuel Dispenser**

- Flow rates from 70L/min
- Accurate to ± 1%
- Noise level below 75dB
- IP55 Protection
- Automatic nozzle with swivel connection
- AC/DC versions available



**51090** \$4,300.00  
**240V Smart Fuel Dispenser**

- Automatic nozzle with flow rates of up to 70L/min
- Can be interfaced with fleet management systems
- Accurate to ± 0.5%
- Continuous AC operation with IP55 protection
- Noise level below 75 dB
- Hose length of 4m



**52000** \$446.00  
**12V Diesel Refuelling Tank Kit**

- Capable of flow rates of up to 50L/min
- Includes 4m of antistatic fuel delivery hose, 2m of battery cable, a stainless steel & brass fuel filter and a manual nozzle
- Maximum head capacity of 15m
- Self priming rotary vane pump includes a built-in bypass
- Duty cycle of 30 minutes on, 30 minutes off
- Suction capacity of up to 2m



**505224N** \$2,320.00  
**Spring Rewind Hose Reel**

- Heavy duty full metal double pedestal construction
- Hose capacity: 15m x 19mm ID
- Hose pressure rating 1,500psi (103bar)
- 3/4" BSP(f) inlet/outlet
- True 3/4" full flow shaft & ports



**8080-G Alemite** \$3,200.00  
**Large Capacity Fuel Hose Reel**

- Suitable for use with air, water, oil and fuel
- Sealed and plated bearings
- 1,000psi (60bar) hose pressure rating
- Supplied complete with 15m x 1" ID hose
- Also suitable for use with oil and air



**HR90005 EL Series** \$1,859.00  
**Spring Rewind Fuel Hose Reel**

- Reinforced steel frame provides maximum strength & stability
- Working pressure of up to 1,000psi (69bar)
- Includes 30m x 25mm ID SAE 100R1 AT hose & hose stop
- 1.5mm thick robust drum with stiffening ribs & flange edges
- Spring life of 20,000 cycles and positive ratchet lock design
- Can be mounted on the floor, wall or ceiling
- Also suitable for use with air and water

## LOCKABLE DIESEL REFUELLING STORAGE AND DISPENSING KITS

- Heavy duty, robustly constructed polyethylene tank
- Built in nozzle holster
- Lockable lid aids diesel fuel security and protects dispensing kit components
- Unique user friendly design with lockable lid to aid fuel and dispensing kit security
- Dispensing kit consists of a 12V pump, antistatic fuel delivery hose, 2 metre battery cables and auto nozzle
- Forklift lift points and tie down capability
- Tank baffles aid vehicle stability
- Suits all makes of single and twin cab utes

PRODUCT NUMBER	CAPACITY	FLOW RATE	W/METER	PRICE
L10040PA	100L	50L/min	--	\$1,061.00
L10040PAM	100L	50L/min	Yes	\$1,243.00
L20040PA	200L	50L/min	--	\$1,135.00
L20040PAM	200L	50L/min	Yes	\$1,317.00
L45040PA	450L	50L/min	--	\$1,552.00
L45040PAM	450L	50L/min	Yes	\$1,736.00
L60040PA	600L	50L/min	--	\$1,691.00
L60040PAM	600L	50L/min	Yes	\$1,874.00



**5060AN** \$421.00  
**Hi-Flo Refuelling Drum Pump**

- Low torque, high volume easy to use pump delivers up to 110L/min
- Delivery rates of 1.1 litres per rotation
- Lockable handle minimises the possibility of unauthorised fuel transfer
- Supplied complete with 2.6m of UV and fuel resistant hose, spout, in built spout holster, 3-piece downtube and a heavy duty bung adaptor



**501A** \$150.20  
**Rotary Action Drum Pump**

- Zinc alloy impellers make the pump suitable for the transfer of diesel, petrol, kerosene, unleaded petrol and low viscosity oils
- Delivery rates of up to 18L/min or 0.26L per rotation
- Cast alloy body construction ensures a long working life and smooth operation
- Includes 2.2m of antistatic hose, bung adaptor, rubber gasket, four chamber rotor assembly, spout and spout holster



**372010** \$1,170.00  
**12V Petrol & Avgas Drum Pump**

- Suitable for the transfers of ULP, Avgas, E10, diesel and kerosene
- Automatic nozzle with flow rates of up to 50L/min
- Inbuilt nozzle holster
- 4m long antistatic fuel hose
- Supplied complete with water captor filter
- Fully-flanged components: pump, flow meter and filters easily fitted or replaced



## DIESEL REFUELLING STORAGE AND DISPENSING KITS

- Dispensing kit consists of a 12V pump, 4m antistatic fuel delivery hose 2m battery cables and automatic nozzle
- Patented self priming rotary vane pump manufactured in Italy is capable of delivery rates of up to 68L/min
- Polyethylene tank cannot dent, scratch or corrode
- Tank baffles aid vehicle stability
- Pallet lift points and recesses for tie down straps on the tank aids handling & installation

PRODUCT NUMBER	CAPACITY	FLOW RATE	W/METER	PRICE
L40049GA	400L	49L/min	--	\$1,639.00
60049GA	600L	49L/min	Yes	\$2,180.00
40068PA	400L	68L/min	--	\$1,688.00
60068PA	600L	68L/min	Yes	\$2,230.00



**1 YEAR WARRANTY**  
**G10010N EL Series** \$59.10  
**Trigger Action Grease Gun**

- Grease pressures of up to 4,000psi (276bar)
- Delivery rates of up to 1.15g per stroke
- Robust die cast aluminium head assembly
- Plastic handle grip
- Heavy duty 4 jaw coupler



**4 YEAR WARRANTY**  
**600A** \$86.10  
**Lever Action Grease Gun**

- Develops grease pressures of up to 12,000psi (828bar)
- Delivers up to 1.6g of grease per stroke
- 450g capacity
- Twin Lock System seals the piston and eliminates the possibility of dummy lubrication
- High volume, high pressure greasing guaranteed



**1 YEAR WARRANTY**  
**G10040N EL Series** \$464.00  
**18V Lithium-ion Cordless Grease Gun**

- Generates grease pressures of up to 10,000psi (690bar)
- Capable of delivering up to 80g/min
- 25 minutes continuous working time
- Supplied with two batteries, 3,000 mAh & 1,500 mAh
- Dispenses up to 12 x 450g cartridges before battery change over is required



**4 YEAR WARRANTY**  
**660AN** \$117.40  
**Trigger Action Grease Gun**

- Grease pressures of up to 8,500psi (586bar)
- Delivers up to 1.1g of grease per stroke
- Twin Lock System seals the piston and eliminates the possibility of dummy lubrication
- High volume/high pressure option facilitates fast and efficient greasing



**504350** \$1,540.00  
**Twin Pedestal Grease Hose Reel**

- Maximum working pressure of 5,800psi (400bar)
- 1/4" BSP(M) inlet/outlet
- Supplied complete with 15m x 1/4" ID R2 hose & 0.8m inlet hose
- Full 1/4" ID port, shaft and swivel
- Versatile positioning of hose guide arm
- Floor, wall, ceiling or tank mountable



**424170** \$1,221.00  
**20kg Grease Kit**

- Delivery rates of up to 0.9kg/min
- 55:1 ratio air motor develops grease pressures of up to 7,700psi (531bar)
- Heavy duty 3 jaw coupler ensures a tight and precise grease nipple connection
- Integral filter protects pump from foreign particle contamination
- Delivery rates of up to 0.9kg/min
- Will handle high density, tacky greases up to NLGI2



**428262** \$1,883.00  
**180kg Air Operated Grease Kit**

- 55:1 ratio grease pump develops up to 7,950psi (548bar)
- Integral filter eliminates the chance of pump tube contamination
- Lightweight ergonomic, cast alloy, grease control valve included
- 180kg drum not included



**428200** \$4,780.00  
**180kg Mobile Grease Kit**

- 55:1 ratio pump will handle high viscosity tacky grease up to NLGI2
- Generates grease pressures of up to 7,975psi (550bar)
- Grease control valve with rigid extension & heavy duty 3 jaw coupler
- Heavy duty spring rewind hose reel with 10m x 1/2" ID R1 hose
- Robust trolley with braked swivelling rubber wheel
- Operates quietly with the aid of a bronze exhaust muffler



**7785-A5** \$7,430.00  
**Alemite High Volume 180kg Grease Pump**

- 40:1 ratio and delivery lengths up to 50m
- Can service 3 or more hose reels
- Free delivery rate with NLGI2 at 25°C of 5kg/min
- 1/2" NPT(f) air inlet
- 1/2" NPT(f) material outlet
- Ideal for mine site and contractor workshops or mobile service vehicles where hazardous and demanding operating conditions exist



**404100** \$987.00  
**20kg Grease Pump**

- 55:1 ratio grease pump only can develop grease pressures of up to 7,700psi (531bar)
- Integral foot valve filter prevents pump tube contamination and failure
- Maximum free flow capacity of 540g/min
- Air motor piston stroke of 35mm
- 1/4" BSP(T) air inlet and grease outlet



**EPL-240SP** \$5,980.00  
**240V 20kg Grease Kit**

- Ideal for mining and heavy industrial applications
- Kit includes a 240V heavy duty pump with 20kg drum cover, follower plate, carry handle, 1/4" ID delivery hose assembly, z swivel, control valve and control valve holster
- Maximum working pressure of 4,000psi (276bar)
- Dispenses up to 120-190g/min
- Suitable for greases up to NLGI2
- Drum not included



**KPL-24EX** \$5,750.00  
**24V 20kg Grease Kit**

- A unique product, this 24V, 20kg grease pump kit is ideal for mining & heavy industrial applications
- Suitable for grease up to NLGI2
- Working pressure of 4,000psi (276bar)
- Can be used with a hose reel inclusive of up to 15m of hose
- Dispenses up to 70-80g/min
- Drum not included



**1 YEAR WARRANTY**  
**G100100SS EL Series** \$427.00  
**Stainless Steel Grease Nipple Assortment Kit**

- 100 grease nipples in a convenient compartmentalised carry kit
- All grease nipples conform to international standards
- Ideal for use in highly corrosive environments
- Manufactured in Germany



**A14512** \$36.20  
**Quick Release Grease Gun Coupler**

- Works with all grease gun types - pneumatic, manual & battery
- 1/8" BSP(T) thread
- Maximum working pressure of 10,000psi (690bar)
- Fits all metric and SAE specification grease nipples
- Eliminates hydraulic lockout
- A14511 1/8" NPT also available



**14514** \$11.60  
**3 Jaw Hydraulic Grease Gun Coupler**

- Industrial quality 3 jaw coupler for standard hydraulic grease nipples
- Working pressure up to 12,000psi (827bar)
- 1/8" BSPF thread
- Works on all metric (DIN) & SAE specification hydraulic grease nipples
- Works with all grease gun types: manual, pneumatic and battery powered grease guns



**14513** \$11.40  
**4 Jaw Hydraulic Grease Gun Coupler**

- Industrial quality 4 jaw coupler for standard hydraulic grease nipples
- 4 jaw design enables quick and effortless grease nipple connect and disconnect
- 12mm spanner slot assists during coupler replacement
- 16mm OD
- Manufactured and designed for heavy duty industrial applications
- 1/8" BSPF thread



**14506** \$56.80  
**Pull on Button Head Grease Gun Coupler**

- Die cast coupler body ensures reliable and dependable lubrication of heavy machinery and contractor's mobile equipment
- Standard button head pull on coupler
- 1/8" BSPF thread



**14507** \$84.40  
**Push on Button Head Coupler with Built in Swivel**

- Die cast coupler body with swivel conveniently slides over standard button head grease nipples and ensures reliable and dependable lubrication of heavy machinery and contractor's equipment
- 1/8" BSPF thread



**BRP5216-YAB** S350.00

### Danger Barrier Reel

- Provides a temporary barrier to clearly identify dangerous areas
- Supplied complete with 16m x 52mm durable yellow/black band with eyelet
- Automatic spring rewind mechanism
- Compact design suitable to mount in most workplace environments

**BRP5216** Safety Barrier Reel as above but with red/white band S350.00



**CR30050 EL Series** S324.00

### 240V Electric Cable Reel 10amp

- 240V, maximum 10amp
- Supplied with 20m of 3 x 1.5mm<sup>2</sup> wires
- Maximum power when coiled is 1,000W, when uncoiled 2,000W
- Thermal overload protection
- Impact tested to IK08 with a top rating of IK10 achieved
- Automatic spring rewind mechanism adjustable safety retraction
- Adjustable safety retraction system



**CR30060 EL Series** S353.00

### 240V Electric Cable Reel 15amp

- 240V, maximum 15amp
- Supplied with 20m of 3 x 2.5mm<sup>2</sup> wires
- Maximum power when coiled is 1,000W, when uncoiled 2,000W
- Thermal overload protection
- Impact tested to IK08 with a top rating of IK10 achieved
- Automatic spring rewind mechanism adjustable safety retraction
- Adjustable safety retraction system



**ECRP24025** S519.00

### 240V Electric Cable Reel 9amp

- Automatic spring rewind mechanism
- Plastic outer casing
- The ideal and safest way to store electric cable
- Swivelling steel wall bracket
- Ratchet stop device is easily inspected by the end user
- Supplied with 25m x 3 x 1.5mm<sup>2</sup> wires - 9amp cable & plugs



**8828N2** S47.60

### 20L Gear Oil Drum Pump

- Capable of delivering up to 110mL on the downstroke
- Downtube extension and extra Rieke adaptor make the pump suitable for use with a variety of 20L drums available on the market
- Ideal pump for the transfer of engine, gear, diff and hydraulic oils in busy vehicle servicing workshops
- Drainback nozzle holster ensures that excess oil ends up back in the drum



**10028** S130.40

### Heavy Duty 20L Gear Oil Drum Pump

- Heavy duty fully serviceable drum pump delivers 170mL on the downstroke
- Non-drip nozzle and drain back holster ensure a clean, safe workshop
- 1.8m long rubber assembly ensures a long service life
- Ideal for use with engine, hydraulic, gear, diff & synthetic oils
- Also suitable for underground coal mine use



**20044N** S170.50

### LED Cordless Workshop Light

- Illuminates vehicles in workshops, industrial, marine and farming applications
- Light output 2.8W
- Full Recharge Time 5 Hours
- Active Life 7-8 Hours
- Dimensions 290mm long x 50mm diameter



**20066N** S189.40

### LED Cordless Workshop Light

- 3W COB high power super bright LED, 1W LED head spot light
- Brightness 230 lm
- Evenly illuminates larger areas than conventional workshop lights
- 3 hours of light before recharging is required
- 240V and in-car chargers included



**7701A** S23.40

### TL Multi Purpose Top Up Kit

- Ideal for topping up difficult to access oiling points in the workshop and at home
- Suitable for all oils, automatic transmission fluids, brake fluids and some hand cleaners
- Not suitable for combustible fluids
- Self-contained unit prevents oil contamination when not in use



**6603A** S47.40

### Brake Cleaner Sprayer

- Large filling opening
- Safety valve at 36psi (2.5bar) with depressurisation option
- Strong translucent bottle with level indicator
- Also suitable for degreaser, tyre shine, hydrocarbon-based solvents, lubricants, vegetable & animal oils



**10705N** S248.00

### Pneumatic Brake Fluid Bleeder

- Working pressure 70psi - 170psi / 4.9bar - 11.9bar
- Air inlet: 1/4"
- Air Consumption: 5.0 CFM
- Extracting tank capacity: 2.0L
- Refilling bottle capacity: 1.0L
- Automatically shuts off when fluid reaches the maximum level



**41006N** S211.80

### Manual Waste Oil Extractor

- 6.5L capacity
- Portable, lightweight and self-contained
- Extracts waste oil from motor vehicles, motor bikes, lawn mowers, etc.
- Also suitable for salt water (bilge) and water applications
- Complete with 3 probes to suit various dipsticks & applications



**AAW8CCD Alemlube Automotive** S14,660.00

### 8CCD Wheel Aligner

- European technology
- Large 24" LCD screen is easy to read and analyse
- Infra red transmission between the sensors
- Bluetooth transmission between the front heads and the cabinet
- Full customer database

**KPH370.42 Ravaglioli** S6,870.00

### 4.2t Electro-Hydraulic Clear Floor Hoist

- Three-stage short arms and two-stage long arms provide asymmetric lifting of vans and off-road vehicles
- Each column features a maintenance-free lifting cylinder
- Maximum lifting height 4,065mm or 4,165mm
- 3 different extensions height available on request from 3,625mm to 5,000mm



**RAV307H.4WS Ravaglioli Set of 4 x 7,500kg** S53,940.00

### Wireless Electro-Hydraulic Mobile Column Lift

- Wireless 2.4 GHz communication among columns
- Each column has a lifting capacity of 7,500kg
- Sets of 4, 6 and 8 columns can be configured
- Handles tyre diameters from 900mm to 1,200mm with a minimum rim diameter of 580mm
- Each column is powered by two 12V maintenance free 100A/h gel type batteries



**OP20L** S6.90

### 20L Oil Drum Pouring Spout

- Makes pouring & emptying a 20L drum easy and spill free
- Fits both plastic and steel 20L drums
- Complete with a tight fitting cap to protect against contaminants
- Avoids unnecessary and costly waste
- Helps protect against spills and potential unsafe situations
- Screws on securely and is easily removed
- Height of 115mm



**504250** **Twin Pedestal Oil Hose Reel** **\$1,489.00**

- Maximum working pressure of 2,300psi (160bar)
- 1/2" BSPT(m) inlet/outlet
- Supplied complete with 15m x 1/2" ID R1 hose and 0.8m inlet hose
- Full 1/2" ID port, shaft and swivel
- Heavy duty double pedestal construction



**505232** **Spring Rewind Hose Reel** **\$2,210.00**

- Supplied complete with 20m x 1/2" ID R1 hose and 0.8m inlet hose
- 3/4" BSPT(m) inlet/outlet
- Dual ball bearing spool support results in very low rotary friction
- Optimised power spring and low friction design ensure smooth & comfortable operation



**8080-F Alemite** **Heavy Duty Oil Hose Reel** **\$3,420.00**

- Corrosion resistant, easy to install and incredibly durable
- Supplied complete with 25m x 3/4" ID hose
- Sealed spring cassette
- Sealed and plated bearings
- Narrow width
- Also suitable for use with fuel, water and air



**508225** **High Volume Oil Hose Reel** **\$2,820.00**

- Supplied with 15m x 1" BSPT(f) ID hose
- 1,250psi (86bar) hose pressure rating
- 1" port nickel coated steel shaft and swivel
- Ideal for high volume applications
- Also suitable for use with fuel, air, water and waste oil



**1185-1124** **Hand Rewind Bare Hose Reel** **\$2,650.00**

- USA made by Coxreels
- Working pressures of up to 3,000psi (207bar)
- 1" NPT inlet/outlet
- Hand rewind hose reel with long handled lock pin
- Low profile hose connector ensures smooth even hose wraps
- Can store and retrieve up 15m x 19mm ID hose



**1195-932-A** **Large Capacity Air Rewind Bare Oil Hose Reel** **\$6,500.00**

- USA made by Coxreels
- Working pressures of up to 600psi (41bar)
- 2" NPT inlet/outlet
- All metal construction
- Can store and retrieve up to 18m x 48mm ID hose
- Full flow brass swivel facilitates high volume fluid transfer
- Also suitable for use with air, water, fuel and waste oil



**454695** **IBC Oil Storage and Transfer Kit - Top Mount** **\$3,880.00**

- Includes 3:1 ratio pump, dual pedestal hose reel with 10m of hose, a top mounting bracket and electronic oil meter
- 3:1 ratio pump facilitates flow rates of up to 18L/min
- Electronic oil meter powered by standard AAA batteries
- IBC not included



**454697** **IBC Oil Storage and Transfer Kit - Side Mount** **\$3,820.00**

- 3:1 ratio pump facilitates flow rates of up to 18L/min
- Includes a 3:1 ratio pump, hose reel inclusive of 10m of hose, a side mounting bracket and an electronic oil meter
- Environmentally friendly as costly and time consuming empty 205L drum disposal is no longer required
- IBC not included



**656110** **1,000L Self Bunded Oil Storage & Dispensing Kit** **\$4,620.00**

- Suitable for the storage and dispensing of oil
- Includes a 3:1 ratio pump, 3m of R1 delivery hose and an electronic oil meter
- Flow rates of up to 12L/min
- Tank dimensions of 1,280mm (L) x 770mm (W) x 1,420mm (H)



**75490/ 73920/ 73910/ 75460** **Self Bunded Twin Skinned Tanks**

- Suitable for the storage of oil, waste oil and diesel fuel
- 75490** 1,500L capacity **\$5,480.00**  
Dimensions of 1,630mm (L) x 770mm (W) x 1,950mm (H)
- 73920** 1,000L capacity **\$3,130.00**  
Dimensions of 1,280mm (L) x 770mm (W) x 1,420mm (H)
- 73910** 750L capacity **\$2,720.00**  
Dimensions of 980mm (L) x 770mm (W) x 1,420mm (H)
- 75460** 400L capacity **\$2,200.00**  
Dimensions of 730mm (L) x 700mm (W) x 1,170mm (H)



**360117** **Hose Reel Mounting Bracket** **\$445.00**

- Allows five open-type or enclosed hose reels to be mounted in a bank
- Suitable for ceiling or wall mounting
- Hose reel installation points are pre-drilled and threaded to reduce installation time - hose reel & meter not included
- Guarantees perfect hose reel alignment



**030020 EL Series** **Waste Oil Drip Tray** **\$139.20**

- Controls and collects oil drips
- Suitable for all brands of hose reels/control valves
- Modular design suits any workshop
- Dimensions: 704mm (H) x 214mm (W) x 81.5mm (D) 165mm (D) inclusive of drip tray



**365300** **Electronic Preset Oil Meter** **\$1,187.00**

- Automatically cuts off when the preset amount of lubricant is dispensed
- Maximum flow rate of 30L/min, minimum flow rate of 1L/min
- 1/2" BSPT(f) swivel supplied standard
- Accurate to ±0.5%
- Can automatically meter from 99.9L & includes a totaliser




**365534** **Electronic Oil Meter** **\$929.00**

- Electronically meters and totalises the amount of lubricant dispensed
- Maximum flow rate of 30L/min
- Fluid inlet is a 1/2" BSPT(f) swivel
- Maximum operating pressure of 1,450psi (100bar)
- Operates with standard AAA batteries



**363054** **3/4" High Volume Oil Control Valve** **\$412.00**

- Flow rates of up to 70L/min
- Durable aluminium die cast body withstands the toughest operating conditions
- Maximum working pressure of 1,450psi (100bar)
- 3/4" BSPT(f) inlet port & swivel
- Lockable valve lever for efficient delivery of large volumes

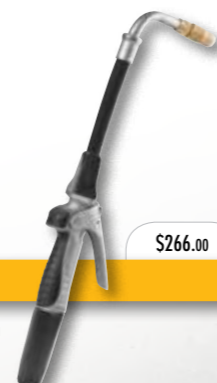

**363114** **1/2" Oil Control Valve** **\$266.00**

- Flow rates of up to 40L/min
- Maximum working pressure of 1,450psi (100bar)
- Trigger lock helps to prevent accidental dispensing
- Manual open/close nozzle operation minimises annoying oil drips & leaks



**454110N** **Oil Transfer Kit with Meter** **\$1,617.00**

- 3:1 ratio pump, 3m x 1/2" ID hydraulic hose & electronic resettable meter
- Flow rates of up to 12L/min
- Air pressure range from 20psi to 140psi
- Air inlet: 1/4" BSP(f)
- 454111N** Also available Oil Transfer Kit with on/off gun **\$1,041.00**



**378110N** **205L Mobile Oil Transfer Kit** **\$5,550.00**

- Supplied with 3:1 air operated oil pump, 8m hose reel, electronic meter and heavy duty drum trolley
- Facilitates quick, efficient and effortless oil transfer in car, light commercial vehicle and truck workshops
- Adjustable flow rates up to 10L/min
- 3:1 ratio oil pump suits 205L drums

# DRUM HANDLING, SPILL CONTAINMENT & CHEMICAL DRUM PUMPS



**80100** **205L Drum Dolly** **\$124.10**

- Includes 4 x 75mm heavy duty casters
- Provides a convenient and easy means of moving 205L drums around a workshop, warehouse or production facility
- Industrial quality steel construction
- Reduces the physical effort of drum handling and provides a safer working environment



**80180** **180kg / 205L Duty Drum Trolley** **\$542.00**

- Labour saving spring loaded drum lifting mechanism
- Repositional drum securing bracket
- Ergonomic 45° angled handles
- Dimensions of 545mm (D) x 440mm (W) x 1,490mm (H)



**80205** **205L Drum Rack** **\$176.80**

- Designed for the convenient moving, safe storage and decanting of 205L drums
- Ideal for workshops, warehouses and production facilities
- Dimensions of 770mm (L) x 510mm (W) x 500mm (H)



**432000** **205L Drum Trolley** **\$644.10**

- 205L drum trolley supplied inclusive of one rubber swiveling wheel with brake
- A hose reel & a pump can be mounted using optional bracket
- Heavy duty construction
- Ergonomic design makes light work of moving 205L drums



**80096** **Heavy Duty Drum Trolley** **\$77.60**

- Includes two 150mm high rubber wheels and a easy to use drum locking device
- Provides a easy and convenient means of moving 20L & 60L drums around a workshop
- Workplace Health and Safety friendly



**80082** **20L/20kg Standard Duty Drum Dolly** **\$80.10**

- Includes 4 x 75mm heavy duty casters
- Provides a convenient and easy means of moving 20L/20kg drums around a workshop, warehouse or production facility
- Industrial quality steel construction
- Reduces the physical effort of drum handling and provides a safer working environment

## SPILL CONTAINMENT

### Drum Storage & Spill Containment



- Cannot rust or corrode
- 100% recyclable polyethylene construction
- Slip resistant texture on workfloor decks and ramps

PRODUCT NUMBER	PRODUCT DESCRIPTION	PRICE INC GST
ST1-100C	100L Spill Tray	\$502.00
ST1-60C	60L Spill Tray	\$312.00
ST1-30C	30L Spill Tray	\$221.00



- Excellent chemical compatibility
- Slip resistant texture on workfloor decks and ramps
- Compatible with most forklifts and pallet trucks

PRODUCT NUMBER	PRODUCT DESCRIPTION	SUMP CAPACITY	SUITABLE FOR USE WITH	PRICE INC GST
SJ-100-061	4 Drum In-line Spill Container	235L	4 x 205L Drums	\$973.00
SJ-100-002	2 Drum Spill Container	236L	2 x 205L Drums	\$711.00
SJ-100-006	4 Drum Spill Container	242L	4 x 205L Drums	\$930.00
SJ-200-051	1 Drum Spill Container	250L	1 x 205L Drum	\$815.00



- Excellent chemical compatibility
- Slip resistant texture on workfloor decks and ramps
- Compatible with most forklifts and pallet trucks

PRODUCT NUMBER	PRODUCT DESCRIPTION	SUMP CAPACITY	SUITABLE FOR USE WITH	PRICE INC GST
SJ-200-010	4 Drum Rack & Spill Container	450L	4 x 205L Drums	\$1,680.00
SJ-200-003	2 Drum Rack & Spill Container	450L	2 x 205L Drums	\$1,089.00
SJ-300-006	4 Drum Work floor & Spill Container	240L	Drums/Containers	\$1,086.00
SJ-300-001	Modular Work floor & Spill Container	120L	Drums/Containers	\$784.00
SJ-300-010	Modular Work floor Ramp	-	Workfloors	\$343.00

PRODUCT NUMBER	PRODUCT DESCRIPTION	SUMP CAPACITY	SUITABLE FOR USE WITH	PRICE INC GST
SJ-200-010	4 Drum Rack & Spill Container	450L	4 x 205L Drums	\$1,680.00
SJ-200-003	2 Drum Rack & Spill Container	450L	2 x 205L Drums	\$1,089.00

- Securely stacks up to 4 x 205L drums
- Drum rack to be used with drum rack base only
- Helps to create WH&S compliant workplace environment
- Drums not included with all spill containment products



PRODUCT NUMBER	PRODUCT DESCRIPTION	SUMP CAPACITY	SUITABLE FOR USE WITH	PRICE INC GST
SJ-400-001	Spill Container Drum Trolley	250L	205L Drums	\$1,757.00

- Double walled construction for securing against leaks
- Safety support locks into place for easy vertical loading & storage
- Rubber wheels supplied as standard



**925** **Polypropylene Drum Pump** **\$137.80**

- Suitable for the transfer of pesticides, herbicides, mild acids, alkalis and detergents
- Delivers 250mL on the down stroke
- Telescopic pick up tube makes it suitable for 60L or 205L drums
- Supplied inclusive of a non-drip swivelling delivery nozzle
- 925V with Viton seals also available



**950** **Lever Action Poly Drum Pump** **\$126.00**

- Suitable for the transfer of pesticides, herbicides, mild acids and detergents
- Delivers 330mL on the down stroke
- Polypropylene body, piston and valves with nitrile seals
- Telescopic pick up tube makes the pump suitable for 60L or 205L drums
- 950V with Viton seals also available



**733** **Stainless Steel Push Pull Action Drum Pump** **\$395.00**

- Delivers 500mL on the upstroke
- 316 stainless steel construction with PTFE seals
- Suitable for 60L or 205L drums
- Transfers ammonia, ethyl acetate, methyl acetate, AdBlue® and nitric acid up to a 50% concentration
- 20066SS also available for 20L drums



**801A** **Stainless Steel Rotary Drum Pump** **\$556.00**

- Rotary action facilitates quick and effortless fluid transfer
- 2" standard BSPT bung adaptor
- Flow rates of up to 18L/min or 0.3L per rotation
- Suitable for the transfer of ammonia, ethyl acetate, methyl acetate, AdBlue® and nitric acid up to a 50% concentration



**301A** **Polypropylene Rotary Drum Pump** **\$206.40**

- Flow rates of up to 20L/min
- Polypropylene, teflon and stainless steel construction offer excellent chemical resistance
- Unique, rotating 2 piece discharge spout assists fluid transfer
- Suitable for the transfer of herbicides, pesticides, chemicals and mild detergents
- Suitable for 60L or 205L drums and bulk tanks



**401A** **Ryton Rotary Drum Pump** **\$293.10**

- Flow rates of up to 20L/min
- Ryton and stainless steel construction provides excellent chemical compatibility
- Unique, rotating 2 piece discharge spout assists fluid transfer
- Suitable for the transfer of low viscosity chemicals, lacquers, AdBlue® and mild acids
- Suitable for 60L or 205L drums



**SHWT-N-1100** \$3,170.00  
**Single Pedestal Oxy-Acetylene Hose Reel**

- USA made by Coxreels
- Auto rewind easily wraps, store and protects hose
- Stores & retrieves 30m x 1/4" ID hose
- Working pressures of up to 200psi (14bar)
- 1" solid steel axle with lubricated precision bearings



**OS615** \$530.00  
**Single Pedestal Oxy-Acetylene Hose Reel**

- Heavy duty steel construction with corrosion resistant powdercoat finish
- Double O-ring design prevents leaks
- Maximum working pressure of 300psi (21bar)
- Supplied inclusive of 15m x 1/4" ID hose and 1.5m lead in hose
- Suitable for use on utes, tray top and flat bed trucks



**SO600** \$487.00  
**Oxy-Acetylene Hose Reel**

- Impact resistant UV stabilised covers for maximum durability
- Can be mounted on the wall or ceiling
- Automatic and positive latching mechanism
- 5/8" BSPT inlet/outlet
- Ideal for back of UTE or service vehicle mobile use
- 15m x 6mm ID hose & 0.9m lead in hose



**S Series**  
**Welding & Gas Hose Reels**

- Genuine industrial quality welding reels ideal for all general welding applications
- Help to comply with increasing WH&S requirements enabling you to provide a safer working environment while at the same time increasing efficiency and productivity
- Automatic and positive hose latching system

PRODUCT NUMBER	PRODUCT DESCRIPTION	HOSE LENGTH	HOSE ID	WORKING PRESSURE	HOSE MATERIAL	COVER COLOUR	HOSE COLOUR	MAX. WORKING TEMP.	REEL INLET BSPT(M)	HOSE OUTLET BSPT(M)	PRICE INC GST
SP610	Propane Hose Reel	20M	6mm	300psi (20Bar)	Rubber	Blue	Orange	-30°C~60°C	5/8"	5/8"	\$364.00
SOP620	Oxy-Propane Hose Reel	15M	6mm	300psi (20Bar)	Rubber	Blue	Blue/Orange	-30°C~60°C	5/8"	5/8"	\$554.00
SA630	Argon Hose Reel	20M	6mm	300psi (20Bar)	Rubber	Blue	Blue	-30°C~60°C	5/8"	5/8"	\$359.00
SO640	Oxy-Acetylene Hose Reel	8M	6mm	300psi (20Bar)	Rubber	Blue	Red/Blue	-30°C~60°C	5/8"	5/8"	\$460.00

**Reusable Hose Ends**

- Reusable hose ends
- 7/16" JIC to Beka-Max 8.3mm hose
- Includes hose sleeve and stud



PRODUCT NUMBER	PRICE INC GST
BT0544	\$24.60
BT0544S	\$51.30
BT0566	\$47.40

**Grease Tubing**

- 10m x 8.3mm diameter 280bar tubing
- Ideal for mine sites, industrial plants, petrochemical facilities, contractors and off road vehicles, wheel loaders, extractors and cooling towers

PRODUCT NUMBER	PRODUCT DESCRIPTION	PRICE INC GST
100120200-20	Grease filled hose	\$121.70
100120101-20	Grease hose empty	\$106.70



**FAZ03552-00** \$21.60  
**Bulkhead Grease Nipple**

- Provides a connection point for manual greasing
- Connects to 6mm grease tubing
- Complete with grease nipple, locking nut and 6mm compression
- For mounting on 3mm plate through 11mm clearance hole

**Header Blocks**

PRODUCT NUMBER	PRODUCT DESCRIPTION	PRICE INC GST
6132	Header block 2 outlets c/w 6mm fittings and grease nipples	\$73.60
6133	Header block 3 outlets c/w 6mm fittings and grease nipples	\$76.70
6134	Header block 4 outlets c/w 6mm fittings and grease nipples	\$91.60
6135	Header block 5 outlets c/w 6mm fittings and grease nipples	\$99.60
6136	Header block 6 outlets c/w 6mm fittings and grease nipples	\$105.60
6138	Header block 8 outlets c/w 6mm fittings and grease nipples	\$114.40



- Assist in the lubrication of hard to access lube points and bearings
- Groups lube points together away from dangerous or contaminated areas
- 6mm OD grease tubing also available



**Grease Nipple Extensions**

- Fit for easy access to recessed lube points
- Zinc plated body for max. corrosion resistance
- Improve safety in hazardous applications

PRODUCT NUMBER	PRODUCT DESCRIPTION	PRICE INC GST
4668D	1/8" BSP - 1/2"	\$11.20
4668E	1/8" BSP - 1"	\$11.70
4668J	1/8" BSP - 1-1/2"	\$14.50
4668K	1/8" BSP - 2"	\$14.50

**12833** \$0.40  
**Grease Nipple Dust Cover**

- Prevents dust and foreign particles from entering a grease nipple
- Assists in preventing grease contamination



**Pulsarlube Mi Vibration Series Single & Multi Point Grease Lubricators**

- Adjustable vibration sensor scale (0-10), 10 being the most sensitive
- Powerful and extremely reliable electro-mechanical lubricators
- Vibration detector senses high & low vibration, free from resonance



Mi125/Main

PRODUCT NUMBER	PRODUCT DESCRIPTION	PRICE INC GST
Mi60/Main	Pulsarlube Mi 60cc main unit with vibration detector (grease pouch, battery & dust cover not included)	\$584.00
Mi125/Main	Pulsarlube Mi 125cc main unit with vibration detector (grease pouch, battery & dust cover not included)	\$578.00
Mi250/Main	Pulsarlube Mi 250cc main unit with vibration detector (grease pouch, battery & dust cover not included)	\$593.00



M60/PL1

M125/PL1

M250/PL1

**Pulsarlube MSP Series Single & Multi Point Grease Lubricators**

- Dispenses grease only when a machine is in operation
- Prevents under & over greasing & optimises maintenance efficiencies
- Operates via an external power supply (AC or DC)



MSP250-VAC/Main

PRODUCT NUMBER	PRODUCT DESCRIPTION	PRICE INC GST
MSP250-VAC/Main	Pulsarlube reusable MSP 250cc main unit with battery & AC power supply (grease pouch, battery & dust cover not included)	\$616.00
MSP500-VAC/Main	Pulsarlube reusable MSP 250cc main unit with battery & AC power supply (grease pouch, battery & dust cover not included)	\$688.00

**Pulsarlube M Series Single & Multi Point Grease Lubricators**

- Easily installed in confined areas & up to 8 points via a progressive divider block
- Well balanced design excels in high vibration applications
- Reduce lubrication expenses with cost saving Service Packs

PRODUCT NUMBER	PRODUCT DESCRIPTION	PRICE INC GST
M60/PL1	Pulsarlube M Series 60cc - filled with PL1 grease	\$383.00
M125/PL1	Pulsarlube M Series 125cc - filled with PL1 grease	\$378.00
M250/PL1	Pulsarlube M Series 250cc - filled with PL1 grease	\$394.00
M500/PL1	Pulsarlube M Series 500cc - filled with PL1 grease	\$487.00

**Pulsarlube E Series Single & Multi Point Grease Lubricators**

- For use in hazardous locations containing flammable liquids, vapours, gases, dust
- More reliable against ambient temperature variations than hydrogen gas type lubricators
- Can be installed remotely up to 1m with 8mm OD tube

PRODUCT NUMBER	PRODUCT DESCRIPTION	PRICE INC GST
E60/PL1	Pulsarlube E Series 60cc - filled with PL1 grease	\$67.10
E120/PL1	Pulsarlube E Series 120cc - filled with PL1 grease	\$72.40
E240/PL1	Pulsarlube E Series 240cc - filled with PL1 grease	\$80.10



E60/PL1

E120/PL1

E240/PL1

**BEKAONE-250N** \$418.00  
**Single Point Grease Lubricator**

- Flexibility to operate and refill with the grease of your choice
- No replacement of grease cartridges or batteries required
- Suitable for any oil or grease up to NLGI2
- Operating temperature range from -20°C to +60°C
- Class leading 145psi (10 bar) maximum pressure
- German design and manufacture - high precision and reliability
- 250cc capacity (6 x 250cc = 1,500cc total before replacement)



**BEKAONE-120** \$219.50  
**Single Point Grease Lubricator**

- Fully sealed electro-mechanical lubricator
- Refillable up to 6 times
- 120cc capacity
- Maximum operating pressure of 145psi (10bar)
- Temperature up to 60°C
- No grease cartridge or batteries required to replace
- Available with heavy duty remote kits
- Kit comes with Single/Double/Triple Bracket, Grease Nipple, Isolation Valve, 3/8" hose and fittings



## EL Series

### HR30000 Series Hot Water Hose Reels

- Increase safety by reducing rewind speed by up to 80%
- High quality impact and UV resistant polypropylene covers
- Maximum operating temperature of 80°C
- Rubber hand grip facilitates WH&S safe handling

PRODUCT NUMBER	PRODUCT DESCRIPTION	WORKING PRESSURE	HOSE LENGTH	HOSE ID	IN/OUTLET BSPT(m)	PRICE INC GST
HR30070	Hot Water Hose Reel	300psi (20bar)	20M	10mm	3/8"	\$227.00
HR30070C	Hot Water Hose Reel with Nozzle	300psi (20bar)	20M	10mm	3/8"	\$358.00
HR30080	Hot Water Hose Reel	300psi (20bar)	15M	12mm	1/2"	\$245.20
HR30080C	Hot Water Hose Reel with Nozzle	300psi (20bar)	15M	12mm	1/2"	\$376.00



HR30070



HR30080C

## EL Series

### HR90000 Series Hose Reels

- Positive latching mechanism automatically locks the hose at the desired length
- Reinforced steel frame provides maximum strength & stability
- 1.5mm thick robust drum with stiffening ribs & flange edges
- Reliable spring life of 20,000 cycles and positive ratchet lock design

PRODUCT NUMBER	PRODUCT DESCRIPTION	WORKING PRESSURE	HOSE LENGTH	HOSE ID	PRICE INC GST
HR90005	Air & Water Hose Reel	300psi (20bar)	30m	25mm	\$1,859.00
HR90010	Air & Water Hose Reel	300psi (20bar)	15m	25mm	\$1,537.00
HR90015	Air & Water Hose Reel	300psi (20bar)	8m	25mm	\$1,003.00
HR90020	Air & Water Hose Reel	300psi (20bar)	40m	19mm	\$2,270.00
HR90025	Air & Water Hose Reel	300psi (20bar)	20m	19mm	\$1,694.00
HR90040	Air & Water Hose Reel	300psi (20bar)	30m	12mm	\$1,408.00
HR90045	Air & Water Hose Reel	300psi (20bar)	25m	12mm	\$1,104.00
HR90050	Oil, Fuel & Waste Oil Hose Reel	1,000psi (69bar)	15m	25mm	\$1,862.00
HR90055	Oil, Fuel & Waste Oil Hose Reel	1,250psi (86bar)	20m	19mm	\$1,776.00
HR90060	Air & Water Hose Reel	2,000psi (138bar)	30m	12mm	\$1,589.00
HR90065	Oil, Fuel & Waste Oil Hose Reel	2,000psi (138bar)	25m	12mm	\$1,217.00
HR90070	Oil Hose Reel	4,000psi (276bar)	30m	10mm	\$1,585.00
HR90075	Grease Hose Reel	4,000psi (276bar)	25m	10mm	\$1,214.00



HR90005



HR90040



SA400N  
Air Hose Reel

\$294.60

- Includes 15m x 12mm ID hybrid polymer hose
- Impact resistant UV stabilised covers
- Automatic and positive latching mechanism
- Adjustable spring tension
- Working pressure of 300psi (20bar)
- 1/2" BSPT(f) inlet & outlet



HR40040 EL Series  
Air Hose Reel

\$187.00

- Supplied complete with 15m x 12mm ID PVC hose and 0.9m lead in hose
- Increase safety by reducing rewind speed by up to 80%
- High quality impact and UV resistant polypropylene covers
- 1/2" BSPT inlet/outlet
- Maximum working pressure of 300psi (20bar)



SA300N  
Air Hose Reel

\$270.00

- 18m x 10mm ID hybrid polymer hose & 0.9m lead in hose
- Impact resistant UV stabilised covers for maximum durability
- Automatic and positive latching mechanism
- Can be mounted on the wall, floor or ceiling
- 3/8" BSPT inlet/outlet
- High flow swivel and fluid path



HR40030 EL Series  
Air Hose Reel

\$179.90

- Supplied complete with 20m x 10mm ID PVC hose and 0.9m lead in hose
- Increase safety by reducing rewind speed by up to 80%
- High quality impact and UV resistant polypropylene covers
- 3/8" BSPT inlet/outlet
- Highflow swivel and fluid path
- Max working pressure of 300psi (20bar)



SW500N  
Water Hose Reel

\$306.00

- Impact resistant UV stabilised covers for maximum durability
- 18m x 12mm ID hose & 0.9m lead in hose
- 1/2" BSPT inlet/outlet
- Maximum working pressure of 180psi (12bar)
- Working temperature range of -20°C to +60°C
- Polyurethane hose provides years of trouble free operation
- Automatic and positive latching mechanism



HR40050 EL Series  
Water Hose Reel

\$184.00

- Supplied complete with 20m x 12mm ID PVC hose and 1.2m lead in hose
- Increase safety by reducing rewind speed by up to 80%
- High quality impact and UV resistant polypropylene covers
- 3/4" BSPT inlet/outlet
- Maximum working pressure of 300psi (20bar)



H10300  
Hand Rewind Bare Hose Reel

\$349.00

- 3/8" ID x 100m hose capacity
- Constructed from heavy gauge powder coated steel
- Maximum operating pressure of 3,000psi (207bar)
- Full flow brass swivel ensures maximum product delivery
- Open hose slot design with self-lubricating bearings

H10120 Also available supplied with 40m x 19mm ID hose capacity \$224.70



8078-D Alemite  
Heavy Duty Single Pedestal Hose Reel

\$2,010.00

- Suitable for air, water or oil with 15m x 12mm ID hose
- Anti lock ratchet
- Sealed and plated bearings
- Power spring cassette
- Metal arbor
- Mounting heights up to 6m



506222  
Single Pedestal Oil Hose Reel

\$853.00

- 15m x 12mm ID hose capacity
- Lightweight one piece molded composite barrel assembly, will not distort or corrode
- 4 x extra large 10mm long plastic ratchet mechanism and latch pawl ensure years of trouble free operation
- Full ported shaft and swivel facilitates maximum product delivery



507222  
Covered Oil Hose Reel

\$1,210.00

- Complete with 15m x 12mm ID hose and 0.8m inlet hose
- Maximum working pressure of 2,240psi (160bar)
- Two corrosion-proof die cast aluminium covers resist bending or distortion due to angular pull
- Can be wall, ceiling, floor or tank mounted
- 1/2" BSPT(m) inlet/outlet



S01700 S Series  
Oil Hose Reel

\$434.00

- Supplied with 10m x 12mm ID hose & lead in hose
- Impact resistant UV stabilised covers for maximum durability
- Automatic and positive latching mechanism
- Working pressure of up to 2,000psi (138bar)
- 1/2" BSPT(f) inlet/outlet
- High flow swivel and fluid path



H10120  
Hand Rewind Bare Hose Reel

\$224.70

- Supplied with 40m x 19mm ID hose capacity
  - Constructed from heavy gauge powder coated steel
  - Maximum operating pressure of 3,000psi (207bar)
  - Full flow brass swivel ensures maximum product delivery
  - Suitable for floor, workbench, wall and mobile applications
- H10260 Also available supplied with 20m x 12mm ID hose capacity \$224.70



# ENGINE PUMPS & TANK LEVEL GAUGES

PM40 Alemlube Genuine Mitsubishi engine

\$1,073.00

## Petrol Driven 1-1/2" Diesel & Water Transfer Engine Pump

- Manufactured with a genuine Mitsubishi engine
- Flow rates of up to 300L/min
- 2.4HP (3,600rpm) air cooled 4-stroke petrol engine
- 1-1/2" (40mm) inlet/outlet
- Maximum suction head of 7m
- Maximum lift head of 22m
- Fuel tank capacity of 1.5L
- Oil tank capacity of 0.4L
- Completely portable with pull start



PH50 Alemlube Genuine Honda engine

\$1,569.00

## Petrol Driven 2" Diesel & Water Transfer Engine Pump

- Manufactured with a genuine Honda engine
- Flow rates of up to 600L/min
- 5.5HP (3,600rpm) air cooled 4-stroke petrol engine
- 2" (50mm) inlet/outlet
- Maximum suction head of 8m
- Maximum lift head of 28m
- Fuel tank capacity of 3.6L
- Oil tank capacity of 0.6L
- Completely portable with pull start



P50 Alemlube

\$605.00

## Petrol Driven 2" Diesel & Water Transfer Engine Pump

- Flow rates of up to 600L/min
- 6.5HP (3,600rpm) air cooled 4-stroke petrol engine
- 2" (50mm) inlet/outlet
- Maximum suction head of 8m
- Maximum lift head of 28m
- Fuel tank capacity of 3.6L
- Oil tank capacity of 0.6L
- Completely portable with pull start



P40 Alemlube

\$550.00

## Petrol Driven 1-1/2" Diesel & Water Transfer Engine Pump

- Flow rates of up to 249L/min
- 4.0HP (3,600rpm) air cooled 4-stroke diesel engine
- 1-1/2" (38mm) inlet/outlet
- Maximum suction head of 7m
- Maximum lift head of 21m
- Fuel tank capacity of 1.6L
- Oil tank capacity of 0.3L
- Completely portable with pull start



ALEM-6100 Alemlube

\$3,100.00

## Tank Gauge with Remote Monitoring & Web Alarm

- Requires no site power, no cables and so no problems
- Using GPRS, the device monitors Float & Rotary style magnetic driven gauges
- The device will use GPRS or GDSP to send data to [www.yourgauge.com](http://www.yourgauge.com)
- Last true value data, historical & archived data can be viewed, downloaded, sorted and analysed as required




ALEM-2020 Alemlube

\$1,605.00

## 240V Tank Gauge with LCD Display

- Continuous reading 1% tank gauge
- Standard probe suits oil tank depths from 0.3m to 3.5m and 2.8m for water based products
- High & low local alarm
- Push button back lit display
- For use with diesel, AdBlue®, gear oil and water



Stores advertised on page one of this catalogue are independent businesses. Every effort has been made to ensure that advertised stock is available, but due to factors beyond the control of Alemlube Pty Ltd not all products advertised in this catalogue are available at all stores. Pricing for the products are special prices available through to 31st of January 2019. Regular prices vary from store to store. The catalogue pricing is calculated in good faith as the average regular price at the time of preparation. Alemlube Pty Ltd will do everything possible, within reason, to maintain stocks of advertised products but cannot be responsible for unforeseen shortfalls beyond their control.

All products are covered by a 2 year warranty (unless otherwise stated) and with the aid of our sixty five strong nationwide Authorised Agent Network, technical support for all Alemlube products featured in this catalogue will never be far away. E.&O.E. Copyright 2018. Reproduction in whole or part is prohibited without written approval. All prices shown include GST. Freight charges may be applicable and may vary from region to region.